



**CASE A**  
Typical driveway, sidewalk not depressed




**CASE B**  
Driveway with depressed sidewalk

### SECTIONS


### DRIVEWAYS




**TYPE A1 CURBS**  
See Table A

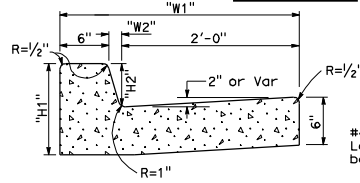


**TYPE A2 CURBS**  
See Table A




**TYPE A3 CURBS**  
Superimposed on existing pavement  
See Table A




**TYPE D CURBS**  
See Table A

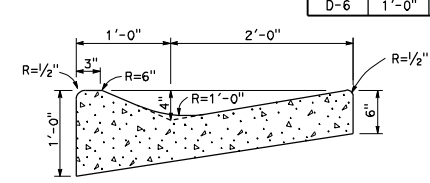


**TYPE E CURB**




**TYPE B1 CURBS**  
See Table A

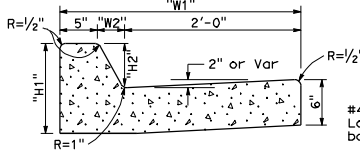


**TYPE B2 CURBS**  
See Table A



**TYPE B3 CURBS**  
Superimposed on existing pavement  
See Table A

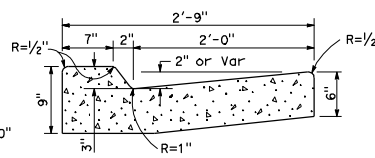

**TYPE B4 CURBS**



**TYPE H CURB**  
On Bridges

### CURBS

#### NOTES:

- Case A driveway section typically applies.
- Use Case B driveway section when ramp slopes would exceed 10% in Case A.
- Use Case B driveway section when sidewalk cross slope would exceed 2% in Case A.
- X=3'-0" except for curb heights over 10" where 4:1 slopes shall be used on curb slope.

- X is a variable when sidewalk is located where wheelchairs may traverse the surface. Slopes shall not exceed 8.33%.
- Sidewalk and ramp thickness "T" at driveway shall be 4" for residential and 6" for commercial.
- Difference in slope of the driveway ramp and the slope of a line between the gutter and a point on the roadway 5'-0" from gutter line shall not exceed 15%. Reduce driveway ramp slope, not gutter slope, where required.

- Minimum width of clear passageway for sidewalk shall be 4'-0".
- Retaining curbs and acquisition of construction easement may be necessary for narrow sidewalks or curb heights in excess of 6".
- Across the pedestrian route at curb ramp locations, the gutter pan slope shall not exceed 1" of depth for each 2'-0" of width.

### CURB QUANTITIES

TYPE	CUBIC YARDS PER LINEAR FOOT
A1-6	0.02585
A1-8	0.03084
A2-6	0.05903
A2-8	0.06379
A3-6	0.01036
A3-8	0.01435
B1-4	0.02185
B1-6	0.02930
B2-4	0.05515
B2-6	0.06171
B3-4	0.00641
B3-6	0.01074
B4	0.05709
D-4	0.04083
D-6	0.06804
E	0.06661

### TABLE A

CURB TYPE	DIMENSIONS			
	"H1"	"H2"	"W1"	"W2"
A1-6	1'-2"	6"	7 1/2"	1 1/2"
A1-8	1'-4"	8"	8"	2"
A2-6	1'-0"	6"	2'-7 1/2"	1 1/2"
A2-8	1'-2"	8"	2'-8"	2"
A3-6	6"	5"	7 1/4"	1 1/4"
A3-8	8"	7"	7 3/4"	1 3/4"
B1-4	1'-0"	4"	7 1/2"	2 1/2"
B1-6	1'-2"	6"	9"	4"
B2-4	10"	4"	2'-7 1/2"	2 1/2"
B2-6	1'-0"	6"	2'-9"	4"
B3-4	4"	3"	7"	2"
B3-6	6"	5"	8 1/2"	3 1/2"
D-4	10"	4"	1'-6"	1'-1"
D-6	1'-0"	6"	2'-2"	1'-8"

DIST COUNTY ROUTE POST MILES TOTAL PROJECT SHEET TOTAL NO. SHEETS

November 17, 2006

PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED CIVIL ENGINEER

Michael Janzen

No. 44788

Exp. 03-31-08

CIVIL

STATE OF CALIFORNIA

To accompany plans dated \_\_\_\_\_

### CURBS AND DRIVEWAYS

NO SCALE

RSP A87A DATED NOVEMBER 17, 2006 SUPERSEDES STANDARD PLAN A87A DATED MAY 1, 2006 - PAGE 113 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A87A**